


DXB – Double Externally Pressurised Bellows Assembly

INSTALLATION INSTRUCTIONS

- Verify the Aflex serial number plate is securely attached, legible, and accessible. Do not remove it, removal voids the warranty. The serial number links to materials, weld procedures, welders, and [MDR records](#).
- Inspect the expansion joint (bellows, hardware, shipping bars) for damage. Transit damage may affect joint length—report immediately. Do not attempt repairs without manufacturer approval (voids warranty).
- Do not remove shipping bars before installation. If they cause issues, contact Aflex. Welded/pipe-end bellows typically have no shipping bars; pipe-end units are packed to prevent length changes.
- Ensure the pipe gap matches the joint size and alignment (unless otherwise specified in the datasheet).
- Use lifting lugs or lift from hardware only. Do not lift from the bellows or shipping bars
- Install flow-lined joints in the correct direction (as indicated on shipping bar stickers).
- Ensure mating flanges are correctly aligned. Torsion stress causes premature failure and is not covered by warranty.
- After installation (bolting or welding), remove shipping bars before hydrotesting or pressurisation, they are not designed to restrain [Pressure Thrust](#)
- Do not exceed the design pressure listed on the datasheet.
- Ensure tie rods (if fitted) are installed before service. Remove shipping bars after installation, but do not remove or modify tie rods, they restrain pressure thrust. Modifications void warranty.
- Aflex does not provide flange bolting torque values, refer to the relevant flange standard.
- For any issues or questions during installation, [contact us](#) Aflex immediately.

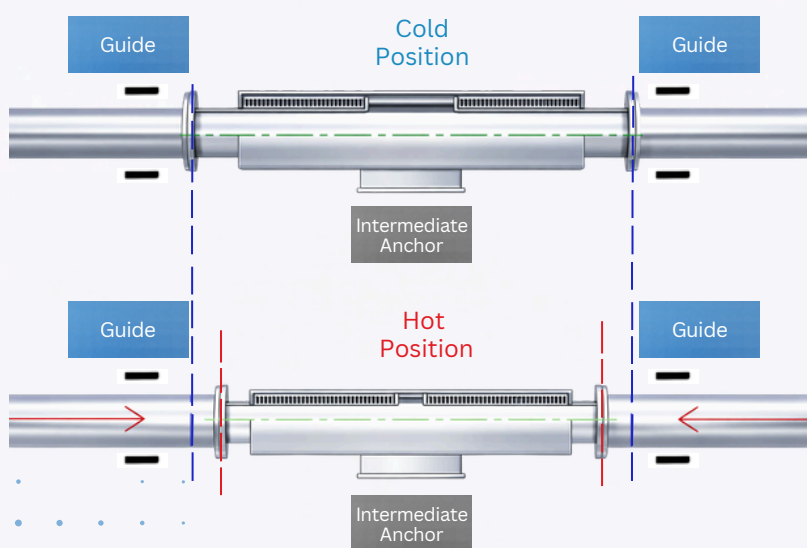

An Aflex Double Externally Pressurised Bellows (DXB) is similar to an XB but allows greater axial movement up to 400 mm, using two bellows elements and an intermediate anchor to evenly distribute movement. It is externally pressurised, keeping the inside at atmospheric pressure, which improves stability and prevents failure. As the pipeline expands, the DXB compresses to absorb movement.

DXBs allow axial movement only (no lateral or angular movement). For movements under 200 mm, an XB is typically used. Like all unrestrained bellows, DXBs generate pressure thrust and is an unrestrained assembly. It generates pressure thrust, so proper anchoring and guiding in accordance with EJMA standards is essential.

